
# VIVANO | Panel Lights



Luminaire for recessed, ceiling or suspended installation designed for a higher glare control. LED Microprismatic diffuser provides UGR<19






## Technical Details

Power : 44W

CCT : 3000K | 4000K | 6000K

CRI : >90

Beam Angle : 110°

Lumen Output : 120lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Extruded Aluminum Frame

Finishing Color : White

Reflector : Micro-Prismatic Diffuser

Size : L597 x W597 x H8mm

Cut out : –

IP Rating : IP20 | IP44

## Light Distribution



## Light Performance



## Order Options

| Model Code | Power | Lumens | CCT | CRI | Beam | Finish | Size | Accessories |
|---|---|---|---|---|---|---|---|---|
| PN-Vivano-RL06 | 44W | 120lm | 3000K<br>4000K<br>6000K | 90 | 110° | White | L597 x W597 x H8mm | |

# SIRIUS | Panel Lights









LED panel having a direct lighting with high lumen efficiency. Adopt an optical lens to offer a uniform light effect.

## Technical Details

Power : 30W

CCT : 3000K | 4000K | 6000K

CRI : >90

Beam Angle : 110°

Lumen Output : 130lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Aluminum Frame

Finishing Color : White

Reflector : PMMA(Lens) + PS(Diffuser)

Size : L59 x W595 x H32mm

Cut out : –

IP Rating : IP40

## Light Distribution



## Light Performance





## Order Options

| Model Code | Power | Lumens | CCT | CRI | Beam | Finish | Size | Accessories |
|---|---|---|---|---|---|---|---|---|
| PN-Sirius-US01 | 30W | 130lm | 3000K<br>4000K<br>6000K | 90 | 110° | White | L59 x W595 x H32mm | |

# LEO | Panel Lights



Led panel light solution with strong aluminum frame structure, which offers a great thermal conductivity. It adopts PMMA LGP with high lumen SMD.


## Technical Details

- Power : 33W
- CCT : 3000K | 4000K | 6000K
- CRI : >90
- Beam Angle : 120°
- Lumen Output : 100lm/W
- Input Voltage : AC 220-240V
- Driver : Triac | 1-10V | DALI
- Material : Aluminum Frame
- Finishing Color : White
- Reflector : PS (diffuser) + PMMA (LGP)
- Size : L595 x W595 x H8.5mm
- Cut out : L570 x W570mm
- IP Rating : IP40






## Light Distribution



## Light Performance






## Order Options

| Model Code | Power | Lumens | CCT | CRI | Beam | Finish | Size | Accessories |
|---|---|---|---|---|---|---|---|---|
| PN-Leo-US01 | 33W | 100lm | 3000K<br>4000K<br>6000K | 90 | 120° | White | L595 x W595 x H8.5mm | |

# REGULUS-30 | Panel Lights



LED panel having a direct lighting with high lumen efficiency.
Uniform light effect with optic lens.
Anti-glare design,UGR<19




## Technical Details

Power : 36W

CCT : 3000K | 4000K | 6000K

CRI : 80

Beam Angle : 90°

Lumen Output : 90lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Aluminum Frame

Finishing Color : White


Reflector : PMMA(Lens) + PS(Diffuser)

Size : L295 x W1195 x H32mm

Cut out : –

IP Rating : IP40

## Light Distribution



## Light Performance




## Order Options

| Model Code | Power | Lumens | CCT | CRI | Beam | Finish | Size | Accessories |
|---|---|---|---|---|---|---|---|---|
| PN-Regulus-US01 | 36W | 90lm | 3000K<br>4000K<br>6000K | 80 | 90° | White | L295 x W1195 x H32mm | |

# REGULUS-60 | Panel Lights



LED panel having a direct lighting with high lumen efficiency.
Uniform light effect with optic lens.
Anti-glare design,UGR<19

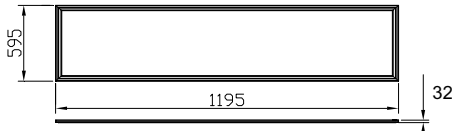


## Technical Details

Power : 60W

CCT : 3000K | 4000K | 6000K

CRI : 80

Beam Angle : 90°

Lumen Output : 90lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Aluminum Frame

Finishing Color : White


Reflector : PMMA(Lens) + PS(Diffuser)

Size : L595 x W1195 x H32mm

Cut out : –

IP Rating : IP40

## Light Distribution



## Light Performance






## Order Options

| Model Code | Power | Lumens | CCT | CRI | Beam | Finish | Size | Accessories |
|---|---|---|---|---|---|---|---|---|
| PN-Regulus60-US01 | 60W | 90lm | 3000K<br>4000K<br>6000K | 80 | 90° | White | L595 x W1195 x H32mm | |

# VIVANO INDIRECT | Panel Lights



LED Panel light with dark-light optics for maximum glare reduction. Very Low energy consumption and low temperature ensures longer product life.

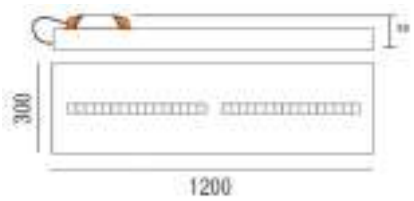


## Technical Details

Power : 30W

CCT : 3000K | 4000K

CRI : 90

Beam Angle : 110°

Lumen Output : 130lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Aluminum Frame

Finishing Color : White


Reflector : Micro-prismatic Lens

Size : L300 x W1200 x H50mm

Cut out : –

IP Rating : IP20 | IP44

## Light Distribution



## Light Performance



## Order Options

| Model Code | Power | Lumens | CCT | CRI | Beam | Finish | Size | Accessories |
|---|---|---|---|---|---|---|---|---|
| PN-Vivano30120-RL06 | 30W | 130lm | 3000K<br>4000K | 90 | 110° | White | L300 x W1200 x H50mm | |

# VIVANO INDIRECT 6060 | Panel Lights




LED Panel light with dark-light optics for maximum glare reduction. Very Low energy consumption and low temperature ensures longer product life.

## Technical Details

Power : 37W

CCT : 3000K | 4000K

CRI : 90

Beam Angle : 110°

Lumen Output : 130lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Aluminum Frame


Finishing Color : White

Reflector : Micro-prismatic Lens

Size : L595 x W595 x H50mm


Cut out : –

IP Rating : IP20 | IP44






## Light Distribution



## Light Performance



## Order Options

| Model Code | Power | Lumens | CCT | CRI | Beam | Finish | Size | Accessories |
|---|---|---|---|---|---|---|---|---|
| PN-Vivano6060-RL06 | 37W | 130lm | 3000K<br>4000K | 90 | 110° | White | L595 x W595 x H50mm | |

# PEGASUS | Panel Lights



Module design panel light with high luminous efficacy, featuring PC louver reflectors to help reduce UGR.







## Technical Details

Power : 36W

CCT : 3000K | 4000K

CRI : 90

Beam Angle : 100°

Lumen Output : 120lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : SPCC

Finishing Color : White


Reflector : Polycarbonate

Size : L595 x W595 x H36mm

Cut out : –

IP Rating : IP40

## Light Distribution



## Light Performance



## Order Options

| Model Code | Power | Lumens | CCT | CRI | Beam | Finish | Size | Accessories |
|---|---|---|---|---|---|---|---|---|
| PN-Pegagus-US01 | 36W | 120lm | 3000K<br>4000K | 90 | 100° | White | L595 x W595 x H36mm | |