
ION | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

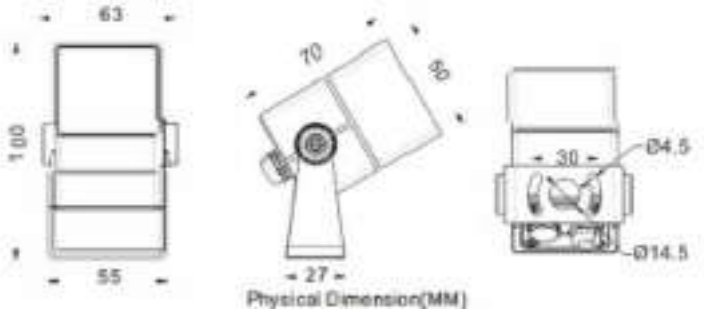

Technical Details

Power : 3W

CCT : 2700K | 3000K | 4000K | 6500K | Yellow Green | Blue | Red | Amber | RGBW

CRI : 90

Beam Angle : 5° | 10° | 12° | 20° | 24° | 36° | 60° | 10°x30°

Lumen Output : 210lm

Input Voltage : DC 24V

Driver : Triac | 0-10V | Dali | DMX 512

Material : Aluminium

Finishing Color : Black | White


Reflector : Tempered Glass

Size : L70 x W50 x H100mm

IP Rating : IP66

Accessories : Cowl

Light Distribution

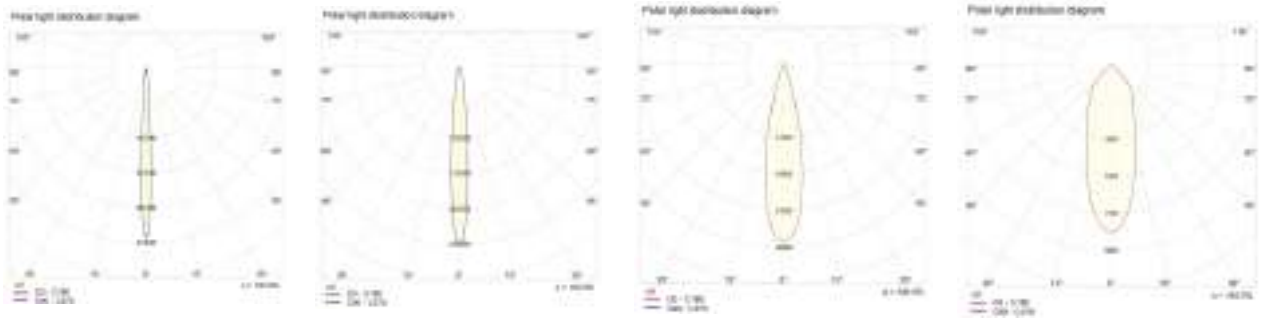

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Ion-BL04	3W	210lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber	90	5° 10° 12° 24° 36° 60° 10°x30°	Black White	L70 x W50 x H100mm	Cowl

ION 4 | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

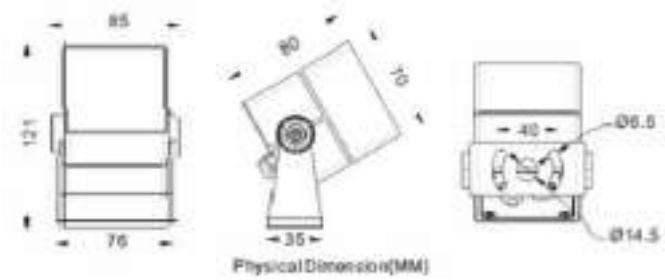

Technical Details

Power : 9W

CCT : 2700K | 3000K | 4000K | 6500K | Yellow Green | Blue | Red | RGB | Amber | RGBW

CRI : 90

Beam Angle : 5° | 10° | 12° | 20° | 30° | 40° | 60° | 10°x22° | 20°x60°

Lumen Output : 630lm

Input Voltage : DC 24V

Driver : Triac | 0-10V | Dali | DMX 512

Material : Aluminium

Finishing Color : Black | White


Reflector : Tempered Glass

Size : L80 x W70 x H121mm

IP Rating : IP66

Accessories : Cowl

Light Distribution

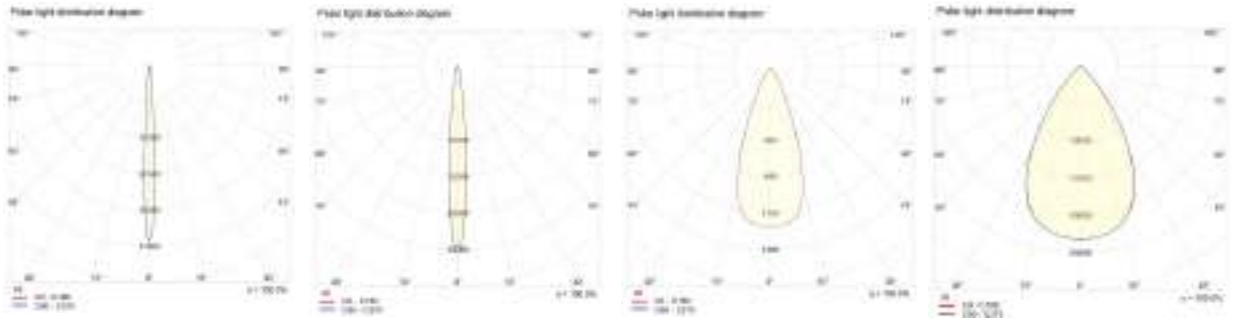

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Ion4-BL04	9W	630lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber	90	5° 10° 12° 30° 40° 60° 10°x22° 20°x60°	Black White	L80 x W70 x H121mm	Cowl

ION 9 | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

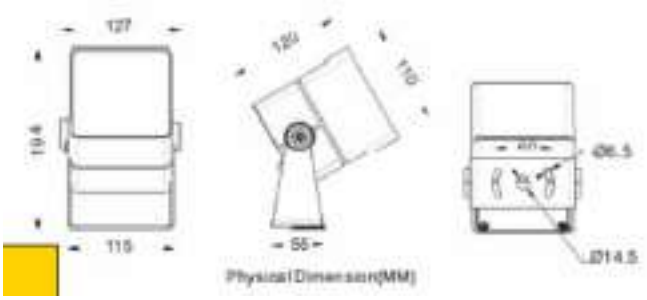

Technical Details

Power : 24W

CCT : 2700K | 3000K | 4000K | 6500K | Yellow Green | Blue | Red | Amber | RGBW

CRI : 90

Beam Angle : 5° | 10° | 12° | 20° | 30° | 40° | 60° | 10°x22° | 20°x60°

Lumen Output : 1680lm

Input Voltage : DC 24V

Driver : Triac | 0-10V | Dali | DMX 512

Material : Aluminium

Finishing Color : Black | White


Reflector : Tempered Glass

Size : L120 x W110 x H194mm

IP Rating : IP66

Accessories : Cowl

Light Distribution

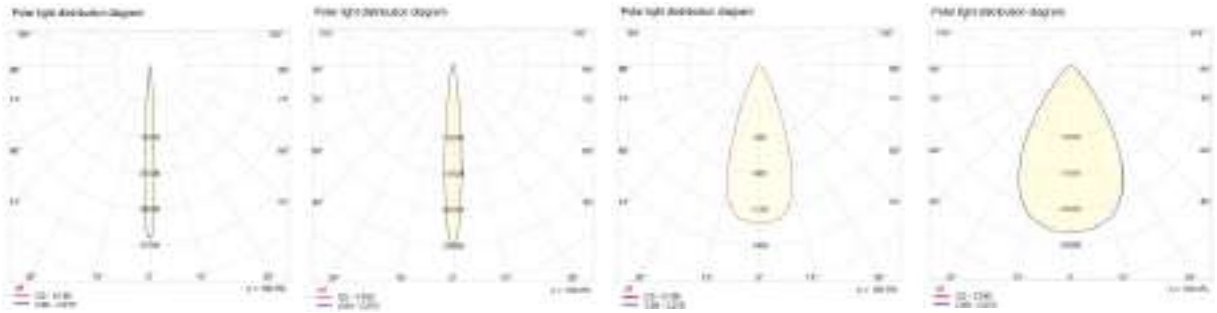

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Ion9-BL04	24W	1680lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber	90	5° 10° 12° 30° 40° 60° 10°x22° 20°x60°	Black White	L120 x W110 x H194mm	Cowl

ION 12 | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

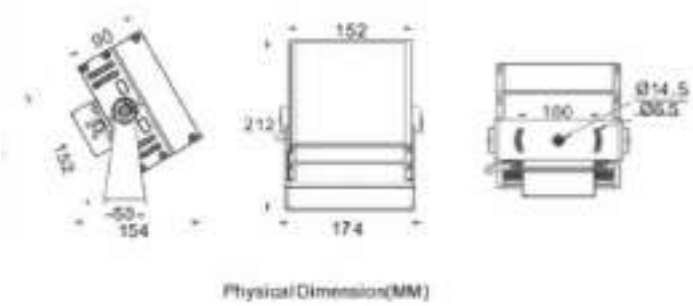

Physical Dimension(MM)

Technical Details

Power : 48W

CCT : 2700K | 3000K | 4000K | 6500K | Yellow Green | Blue | Red | Amber | RGBW

CRI : 90

Beam Angle : 5° | 10° | 12° | 20° | 30° | 40° | 60° | 10°x22° | 20°x60°

Lumen Output : 3360lm

Input Voltage : DC 24V

Driver : Triac | 0-10V | Dali | DMX 512

Material : Aluminium

Finishing Color : Black | White


Reflector : Tempered Glass

Size : L90xW152xH212mm

IP Rating : IP66

Accessories : Cowl

Light Distribution

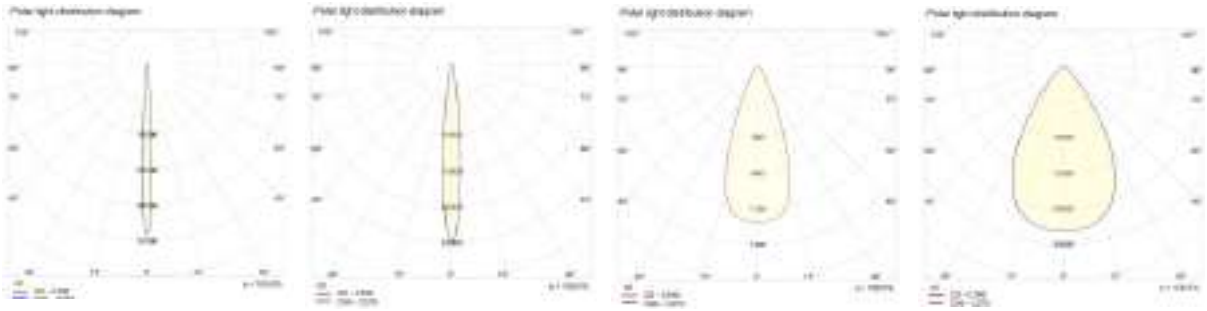

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Ion12-BL04	48W	3360lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber	90	5° 10° 12° 30° 40° 60° 10°x22° 20°x60°	Black White	L90xW152xH212mm	Cowl

CYRA | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

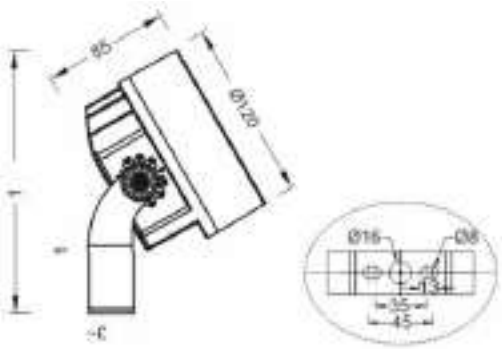

Technical Details

Power : 24W | 36W | 54W

CCT : 2700K | 3000K | 4000K | 6500K | RGBW

CRI : 90

Beam Angle : 3° | 5° | 8° | 10° | 12° | 20° | 24° | 36° | 60° | 10°x30°

Lumen Output : 1680lm | 2520lm | 3780lm

Input Voltage : DC 24V

Driver : Triac | 0-10V | Dali | DMX 512

Material : Aluminium

Finishing Color : Black | White


Reflector : Tempered Glass

Size : Ø120 x H176mm | Ø150 x H209mm | Ø180 x H245mm

IP Rating : IP66

Accessories : Cowl

Light Distribution

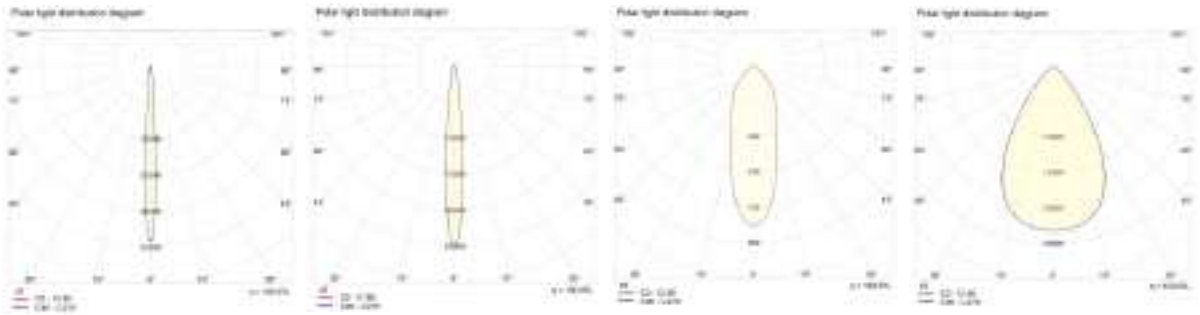

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Cyra-BL04	24W 36W 54W	1680lm 2520lm 3780lm	2700K 3000K 4000K 6500K RGBW	90	3° 5° 8° 10° 12° 20° 24° 30° 60° 10°x30°	Black White	Ø120 x H176mm Ø150 x H209mm Ø180 x H245mm	Cowl

SOLANA | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.



Technical Details

Power : 20W | 42W | 54W | 72W | 100W

CCT : 2700K | 3000K | 4000K | 6500K | RGBW

CRI : 90

Beam Angle : 3° | 5° | 8° | 10° | 12° | 20° | 24° | 36° | 60° | 10°x30°

Lumen Output : 1400lm | 2940lm | 3780lm | 5040lm | 7000lm

Input Voltage : DC 24V

Driver : Triac | 0-10V | Dali | DMX 512

Material : Aluminium

Finishing Color : Black | White


Reflector : Tempered Glass

Size : Ø120 x H216mm | Ø150 x H246mm | Ø180 x H280mm | Ø210x H326mm | Ø240 x H353mm

IP Rating : IP66

Accessories : Filter | Textured diffusion lenses | Honeycomb louver | Round meshed grill

Light Distribution

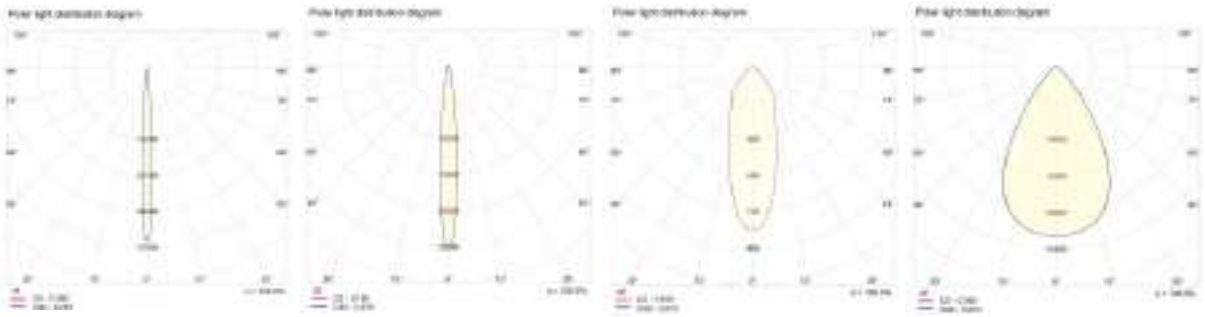

Light Performance




Order Options


Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Solana-BL04	20W 42W 54W 72W 100W	1400lm 2940lm 3780lm 5040lm 7000lm	2700K 3000K 4000K 6500K RGBW	90	3° 5° 8° 10° 12° 20° 24° 30° 60° 10°x30°	Black White	Ø120 x H216mm Ø150 x H246mm Ø180 x H280mm Ø210x H326mm Ø240 x H353mm	Filter Textured diffusion lenses Honeycomb louver Round meshed grill

SOL | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.





Technical Details

Power : 120W | 150W | 200W

CCT : 2700K | 3000K | 4000K | 6500K | Yellow Green | Blue | Red | Amber | RGBW

CRI : 90

Beam Angle : 5° | 8° | 10° | 12° | 20° | 25° | 30° | 40° 45° | 60° | 10°x22° | 15°x55° | 20°x60°

Lumen Output : 12000lm | 15000lm | 20000lm

Input Voltage : AC 220-240V

Driver : Triac | 0-10V | Dali | DMX 512

Material : Die cast aluminum

Finishing Color : Black


Reflector : Tempered Glass

Size : Ø300 x H381mm | Ø370 x H446mm | Ø425 x H498.5mm

IP Rating : IP66

Accessories : Cowl

Light Distribution

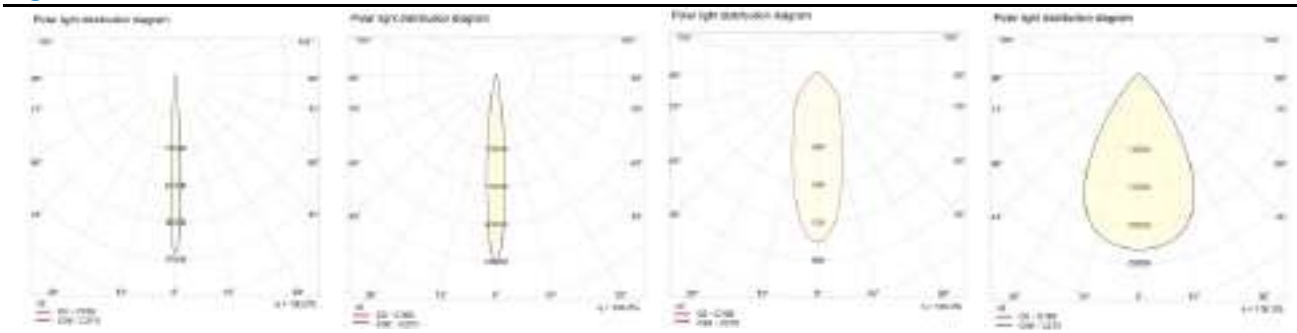

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Sol-BL04	120W 150W 200W	12000lm 15000lm 20000lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber	90	5° 8° 10° 12° 20° 25° 30° 40° 45° 60° 10°x22° 15°x55° 20°x60°	Black	Ø300 x H381mm Ø370 x H446mm Ø425 x H498.5mm	Cowl

Cyra RGBW | Projector Lights




The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.



Technical Details

Power : 12W
Lumen Output :680lm
CRI :>80
Beam Angle : 10°/15°/25/45°/60°/ 20*40°
CCT : RGBW (6500K)
Input Voltage :DC 24V
Driver : DMX
Material : Aluminium (ADC12)
Finishing Color : Grey RAL7047
Reflector : Tempered Glass
Size :D 125 x H 155mm
IP Rating : IP67

Light Distribution

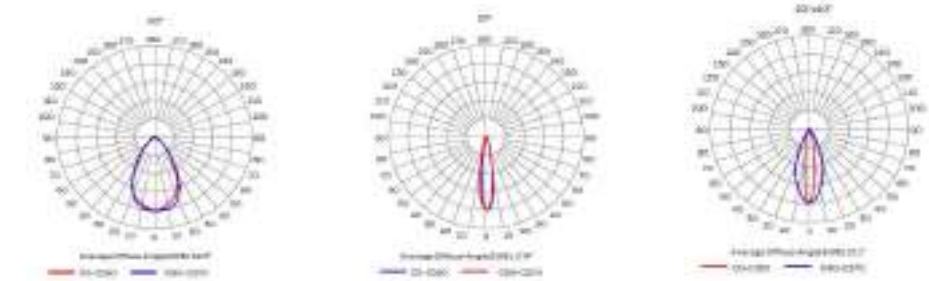

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-10801-10	12W	680lm	RGBW (6500K)	>80	10°/15°/25°/45°/ 60°/20*40°	Grey	D 125 x H 155mm	Halfglare Shield Honeycomb

Solana RGBW | Projector Lights




The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

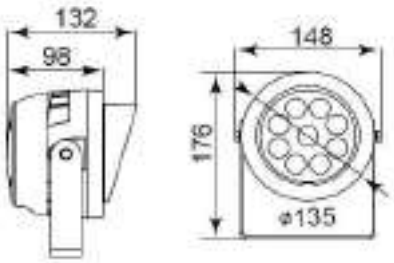

Technical Details

Power : 10W
Lumen Output :560lm
CRI :>80
Beam Angle : 5°/10°/15°/30°/45°/60°
CCT : RGBW (6500K)
Input Voltage :DC 24V
Driver : DMX
Material : Die Cast Aluminium
Finishing Color : Black
Reflector : Tempered Glass
Size :D 148 x H 176mm
IP Rating : IP66

Light Distribution

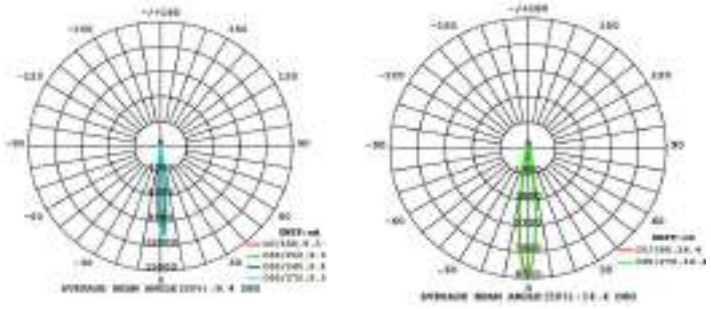

Light Performance



Order Options


Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-YS207A-10	10W	560lm	RGBW (6500K)	>80	5°/10°/15°/30°/ 45°/60°	Black	D 148 x H 176mm	Antiglare Shield

Haley | Projector Lights






The outdoor LED wall washer provides powerful and evenly distributed illumination for architectural façades and exterior surfaces. With its robust design and efficient lighting performance, it is ideal for highlighting buildings, landscapes, and structural details in outdoor environments.

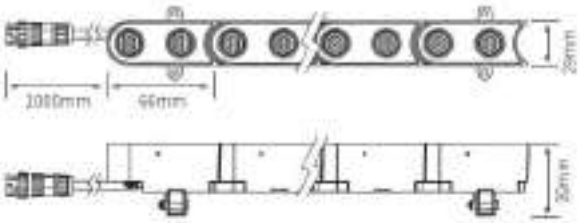



Technical Details

Power : 10W
Lumen Output :560lm
CRI :>80
Beam Angle : 15°/30°/45°/60°/15°x50°
CCT : 3000K/4000K/6500K
Input Voltage :DC 24V
Driver : DMX
Material : Die Cast Aluminium
Finishing Color : Black
Reflector : Tempered Glass
Size :D 148 x H 176mm
IP Rating : IP66

Light Distribution







Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-SNYS-03	3.15W	300lm	3000K 4000K 6500K	90	15°/30°/45°/60°/15°x50°	Grey/Black	L 66 x W 29 x H 39mm	Antiglare Shield

Ion 4 Eco | Projector Lights




The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

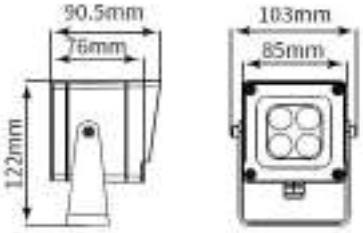

Technical Details

Power : 7.7W
Lumen Output :600lm
CRI :>80
Beam Angle :10°/15°/30°/45°/60°
CCT : 3000K/4000K/6500K
Input Voltage :AC 220- 240V
Driver : On/Off
Material : Die Cast Aluminium
Finishing Color : Grey
Reflector : Tempered Glass
Size : D 85mm, W 90.5mm, H 122mm
IP Rating : IP66

Light Distribution

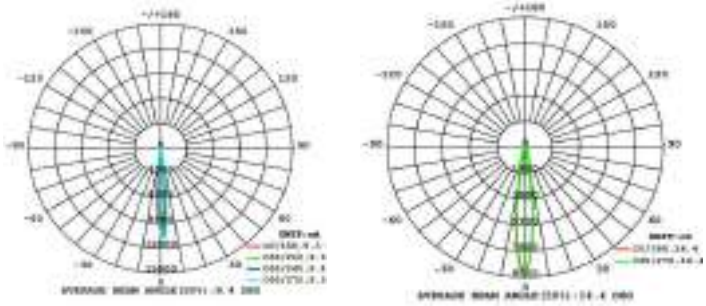

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-YS208-7	7.7W	600lm	3000K 4000K 6500K	>80	10°/15°/30°/ 45°/60°	Grey	D 85mm, W 90.5mm, H 122mm	-

Solana RGBW | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

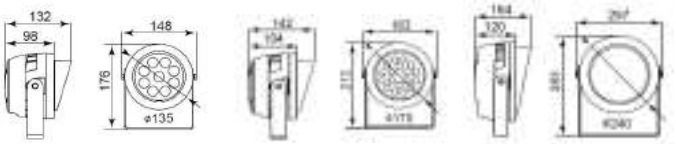


10W 15W 20W

Technical Details

Power : 10W/15W/20W
Lumen Output :560lm/840lm/1120lm
CRI :>80
Beam Angle : 5°/10°/15°/30°/45°/60°
CCT : RGBW (6500K)
Input Voltage :DC 24V
Driver : DMX
Material : Die Cast Aluminium
Finishing Color : Black
Reflector : Tempered Glass
Size :D 148 x H 176mm/D 183 x H 213mm/D 257 x H 283mm
IP Rating : IP66

Light Distribution

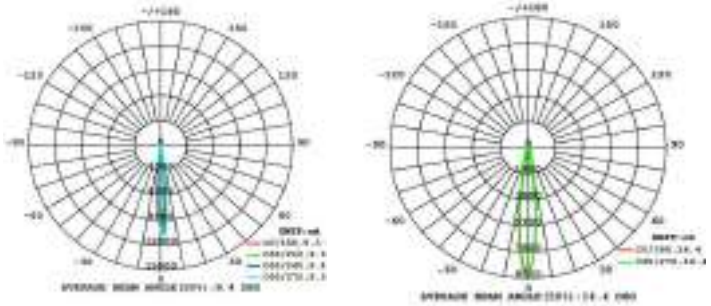

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-YS207A-10	10W	560lm					D 148 x H 176mm	
EL-YS207A-15	15W	840lm	RGBW (6500K)	>80	5°/10°/15°/30°/ 45°/60°	Black	D 183 x H 213mm	Antiglare Shield
EL-YS207A-15	20W	1120lm					D 257 x H 283mm	

Cyra RGBW | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.






Technical Details

Power : 5W/10W
Lumen Output :290lm/580lm
CRI :>80
Beam Angle : 10°/15°/25°/45°/60°
CCT : RGBW (6500K)
Input Voltage :DC 24V
Driver : DMX
Material : Aluminium (ADC12)
Finishing Color : Black
Reflector : Tempered Glass
Size :D 110 x H 152.5mm/ D 110 x H 152.5mm
IP Rating : IP66

Light Distribution





Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-YD-05	5W	290lm	RGBW (6500K)	>80	10°/15°/25°/45°/ 60°	Black	D 110 x H 152.5mm	Halfglare Shield
EL-YD-10	10W	580lm						

Ion 4 Eco | Projector Lights




The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

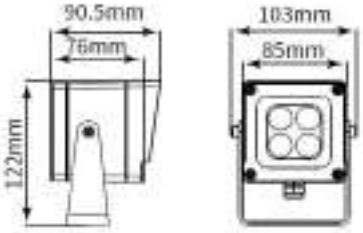

Technical Details

Power : 7.7W
Lumen Output :600lm
CRI :>80
Beam Angle :10°/14°/30°/45°/60°
CCT : 3000K/4000K/6500K
Input Voltage :AC 220- 240V
Driver : On/Off
Material : Die Cast Aluminium
Finishing Color : Grey
Reflector : Tempered Glass
Size : D 85mm, W 90.5mm, H 122mm
IP Rating : IP66

Light Distribution

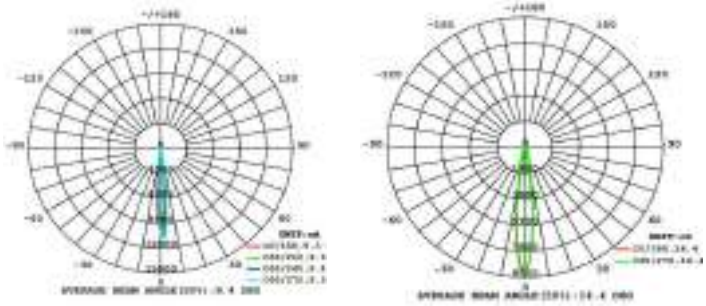

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-YS208-7	7.7W	600lm	3000K 4000K 6500K	>80	10°/14°/30°/ 45°/60°	Grey	D 85mm, W 90.5mm, H 122mm	-

Haley | Projector Lights





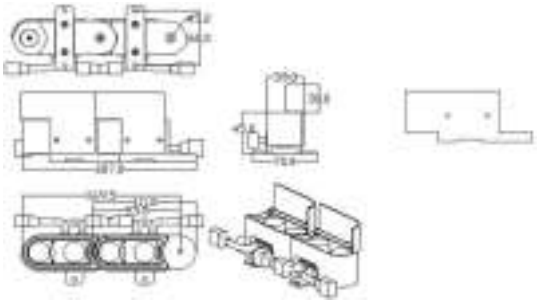



The outdoor LED wall washer provides powerful and evenly distributed illumination for architectural façades and exterior surfaces. With its robust design and efficient lighting performance, it is ideal for highlighting buildings, landscapes, and structural details in outdoor environments.


Technical Details

Power : 3.15W/4W
Lumen Output :300lm/380lm
CRI :90
Beam Angle : 15°/30°/45°/60°/15°x50°
CCT : 3000K/4000K/6500K
Input Voltage :DC 24V
Driver : On/Off
Material : Aluminium
Finishing Color : Black/Grey
Reflector : Glass
Size :L 76 x W 39 x H 45mm/L 110 x W 39 x H 45mm
IP Rating : IP67

Light Distribution







Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-SNYS-03	3.15W	300lm	3000K 4000K 6500K	90	15°/30°/45°/60°/15°x50°	Grey/Black	L 76 x W 39 x H 45mm	Antiglare Shield
EL-SNYS-04	4W	380lm					L 110 x W 39 x H 45mm	