
OBERON | Recessed Spotlight



LED downlight with traditional deep reflector. CCT changeable function is available. A perfect alternative to traditional recessed luminaries.


Technical Details

- Power : 10W | 13W
- CCT : 3000K | 4000K | 5000K
- CRI : >80
- Beam Angle : 80°
- Lumen Output : 80lm/W
- Input Voltage : AC 220-240V
- Driver : Triac | 1-10V | DALI
- Material : Die Cast Aluminium
- Finishing Color : Black | White
- Reflector : White | Black | Silver
- Size : Ø110 x 54mm
- Cut out : Ø90-95mm
- IP Rating : IP54





Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Oberon-US01	10W 13W	80lm	3000K 4000K 5000K	80	80°	White Black	Ø110 x 54mm	Drop Glass Halo Glass

AVIOR | Recessed Spotlight



LED downlight with high lumen SMD LED and PC diffuser, which ensures uniform lighting and high light efficiency.



Size	Dimensions (mm)			
	A	B	C	D
3"	110	44	85	80
4"	145	48	120	104
5"	170	49	139	124
8"	228	48	195	179
10"	280	56	228	214

Technical Details

Power : 10W | 12W | 18W | 25W | 35W

CCT : 3000K | 4000K | 5000K

CRI : >80

Beam Angle : 100°

Lumen Output : 100-130lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : White

Reflector : White


Size : Ø110 x 44mm | Ø145 x 48mm | Ø170 x 49mm | Ø228 x 48mm | Ø280 x 56mm

Cut out : Ø90-95mm | Ø120-130mm | Ø140-150mm | Ø200-210mm | Ø230-260mm

IP Rating : IP54

Light Distribution

Polar light distribution diagram

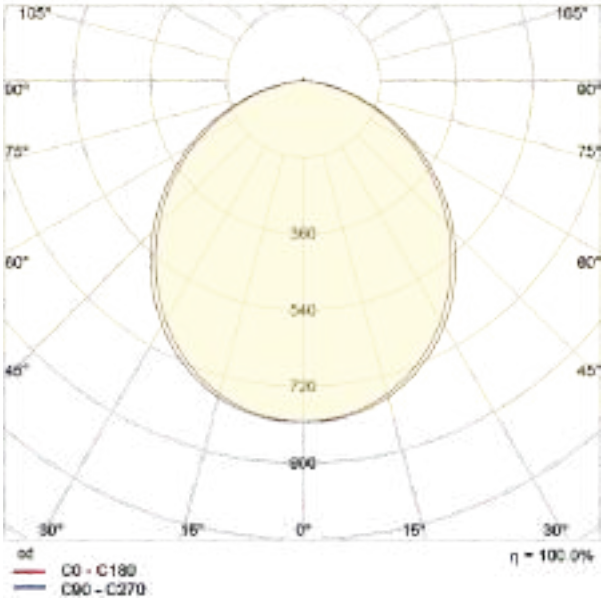

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Avior-US01	10W 12W 18W 25W 35W	100-130lm	3000K 4000K 5000K	80	80°	White	Ø110 x 44mm Ø145 x 48mm Ø170 x 49mm Ø228 x 48mm Ø280 x 56mm	

NASH | Recessed Spotlight



LED down light with super slim design. High lumen SMD LED and PC diffuser provide uniform light.Aluminum profile provides excellent thermal dissipation.

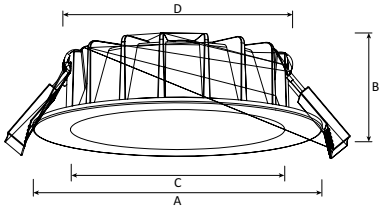

Size	Dimensions (mm)			
	A	B	C	D
3"	110	30	81.5	87
4"	145	30	106	115
6"	190	30	143	152
8"	225	34	173	185

Technical Details

Power : 10W | 13W | 18W | 25W | 35W | 42W

CCT : 3000K | 4000K | 5000K

CRI : >80

Beam Angle : 100°

Lumen Output : 80lm/w

Input Voltage : AC 220-240V

Driver : Triac

Material : Die Cast Aluminium

Finishing Color : White


Reflector : White

Size : Ø110 x 30mm | Ø145 x 30mm | Ø190 x 30mm | Ø225 x 34mm |

Cut out : Ø90-95mm | Ø120-130mm | Ø160-170mm | Ø200-210mm

IP Rating : IP54

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Nash-US01	10W 13W 18W 25W 35W 42W	80lm	3000K 4000K 5000K	80	100°	White	Ø110 x 30mm Ø145 x 30mm Ø190 x 30mm Ø225 x 34mm	

NASH-SQ | Recessed Spotlight



LED Down light adopts high lumen SMD LED, PMMA diffuser with even light output.

Technical Details

Power : 25W

CCT : 3000K | 4000K | 5000K

CRI : >80

Beam Angle : 100°

Lumen Output : 80lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium


Finishing Color : White

Reflector : White

Size : L190 x W190 x H54mm


Cut out : L165 x W165mm

IP Rating : IP20 | IP44

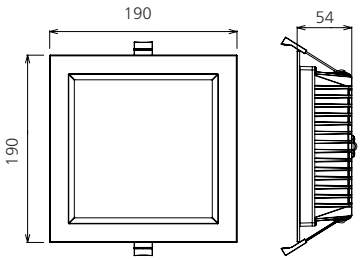



Light Distribution

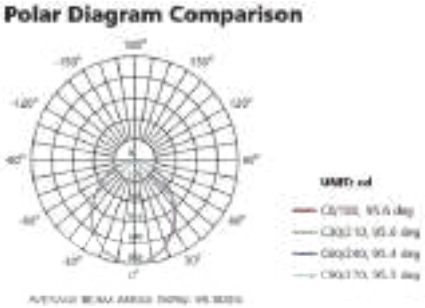

Light Performance






Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-NashSQ-US01	25W	80lm	3000K 4000K 5000K	80	100°	White	L190 x W190 x H54mm	

LYNX | Recessed Spotlight



Deep anti-glare spotlights, 4 sizes, soft & even light, bright contrast between light and dark.





Technical Details

Power : 15W | 20W | 30W

CCT : 2700K | 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 15° | 24° | 38° | 60°

Lumen Output : 110lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : White | Black

Reflector : White | Black | Silver


Size : Ø83 x H52mm | Ø110 x H65mm | Ø160mm x H93mm

Cut out : Ø75mm | Ø95mm | Ø145mm

IP Rating : IP45

Light Distribution

15°




Luminous flux luminaire 1509lm(EXTREME CUT OFF)

Beam Angle:15°

h(m)	E(lx)	D(m)
1	7527	0.33
2	1882	0.65
3	836	0.98
4	470	1.30
5	301	1.63

25°




Luminous flux luminaire 1508lm(EXTREME CUT OFF)

Beam Angle:25°

h(m)	E(lx)	D(m)
1	5205	0.44
2	1301	0.87
3	578	1.31
4	325	1.75
5	208	2.19

38°



Luminous flux luminaire 1538lm(EXTREME CUT OFF)

Beam Angle:38°

h(m)	E(lx)	D(m)
1	2893	0.71
2	723	1.42
3	322	2.13
4	181	2.84
5	116	3.55

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Lynx-SD03	15W 20W 30W	110lm	2700K 3000K 4000K 5000K	90	15° 24° 38° 60°	White Black	Ø83 x H52mm Ø110 x H65mm Ø160mm x H93mm	

ORION | Recessed Spotlight



Recessed COB trimless down lights with high lumen efficiency. Deep anti-glare with lens optics.

Technical Details

Power : 15W

CCT : 2700K | 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 24° | 36° | 60°

Lumen Output : 110lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : White | Black

Reflector : White | Black | Silver

Size : Ø100 x H95mm


Cut out : Ø75mm

IP Rating : IP40





Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Lynx-SD03	15W	110lm	2700K 3000K 4000K 5000K	90	24° 36° 60°	White Black	Ø100 x H95mm	

KEPLER | Recessed Spotlight



Deep reflector design with anti-glare effect. Die-casting housing provides excellent heat dissipation performance.

Technical Details

Power : 18W | 22W | 25W | 32W

CCT : 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 60°

Lumen Output : 90lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium


Finishing Color : White | Black


Reflector : Silver

Size : L190 x W190 x H102 mm

Cut out : L170 x W170mm


IP Rating : IP40







Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Kepler-US01	18W 22W 25W 32W	90lm	3000K 4000K 5000K	90	60°	White Black	Ø100 x H95mm	Full Frosted Drop Glass Halo Drop Glass






BELLATRIX | Recessed Spotlight



Linear recessed downlight with excellent thermal management. Modular lens and multi-louver reflectors design realize anti-glare UGR<19 effect.

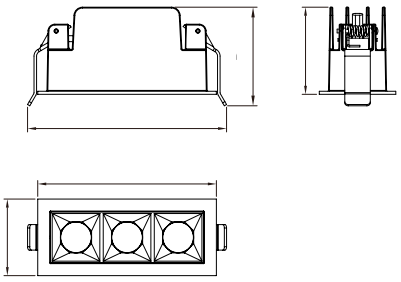

Technical Details

Power : 4W | 6W | 9W | 13W | 25W | 37W

CCT : 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 15° | 36°

Lumen Output : 80lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : White | Black


Reflector : Black

Size : L45 × W45 × H42mm | L76 × W45 × H51mm
L105 × W45 × H51mm | L147 × W45 × H51mm |
L280 × W45 × H51mm | L413 × W45 × H51mm

Cut out : L37 × W37mm | L68 × W37mm |
L97 × W37mm | L139 × W37mm |
L272 × W37mm | L405 × W37mm

IP Rating : IP20

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Bellatrix-US01	18W 22W 25W 32W	90lm	3000K 4000K 5000K	90	60°	White Black	Ø100 x H95mm	

EOS | Recessed Spotlight



LED recessed deep anti glare downlight. Die-casting housing provides excellent heat dissipation performance.





Technical Details

Power : 5W | 10W | 20W | 30W | 40W

CCT : 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 15° | 24° | 38°

Lumen Output : 70-100lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V

Material : Die Cast Aluminium

Finishing Color : White | Black


Reflector : White | Black | Silver


Size : Ø70 x H56mm | Ø90 x H72mm | Ø110 x H92mm


Cut out : Ø60mm | Ø75mm | Ø110mm | Ø120mm | Ø140mm

IP Rating : IP20

Light Distribution

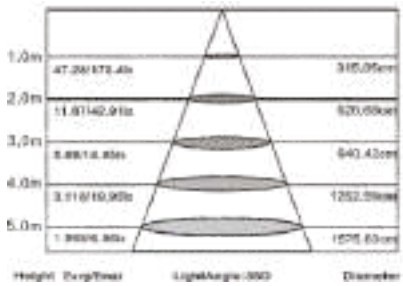

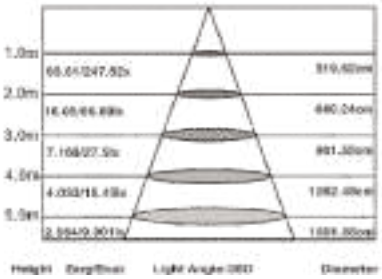

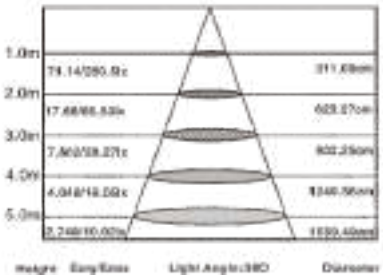

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Eos-LS02	5W 10W 20W 30W 40W	70-100lm	3000K 4000K 5000K	90	15° 24° 38°	White Black	Ø70 x H56mm Ø90 x H72mm Ø110 x H92mm	


KORONIS | Recessed Spotlight



Our anti-glare recessed square spotlight with minimum trim and tilt 30° for adjusting lighting angle.


Technical Details


- Power : 7W | 12W
- CCT : 2700K | 3000K | 4000K | 5000K
- CRI : >90
- Beam Angle : 24° | 36° | 55°
- Lumen Output : 85lm/w
- Input Voltage : AC 220-240V
- Driver : Triac | 1-10V | DALI
- Material : Die Cast Aluminium
- Finishing Color : White | Black
- Reflector : White | Black | Silver
- Size : L85 x W85 x H105mm | L85 x W85 x H111mm
- Cut out : L75 x W75mm
- IP Rating : IP54 | IP40






Light Distribution

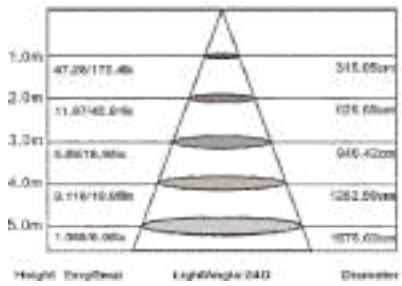

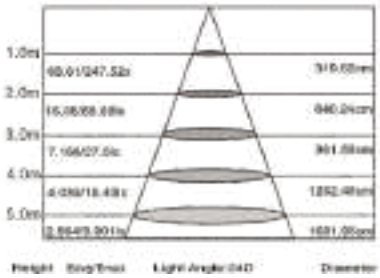

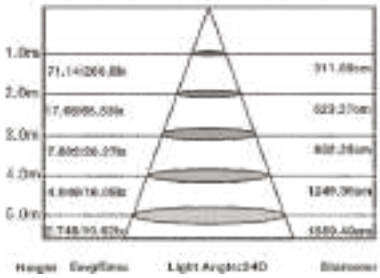

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Koronis-LS02	7W 12W	85lm	2700K 3000K 4000K 5000K	90	24° 36° °	White Black	L85 x W85 x H105mm L85 x W85 x H111mm	