PLUTO | Recessed Spotlight



Minimalistic design with cutout of 35mm.
Deep recessed LED.
Soft curved design.
With complete glare control and visual comfort.

Technical Details

- Power : 1.5W
- CCT : 3000K | 4000K
- CRI : >90
- Beam Angle : 18° | 30°
- Lumen Output : 110lm/W
- Input Voltage : 24V DC
- Driver : Triac | 1-10V | DALI
- Material : Aluminium
- Finishing Color : Black | White
- Reflector : White | Black
- Size : Ø40.5 x H52mm
- Cut out : 35mm
- IP Rating : IP20





Light Distribution



Light Performance





Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Pluto-EL08	1.5W	110lm	3000K 4000K	90	18° 30°	White Black	Ø40.5 x H52mm	

NEEDLE | Recessed Spotlight



Minimalistic trimless design with cutout of 35mm.
Deep recessed LED Trimless spotlight.
With complete glare control and visual comfort.





Φ35

Technical Details

Power : 5W

CCT : 3000K | 4000K

CRI : >90

Beam Angle : 12° | 30° | 36° | 60°

Lumen Output : 350lm/W

Input Voltage : 24V DC

Driver : Triac | 1-10V | DALI

Material : Aluminium

Finishing Color : Black | White

Reflector : White | Black

Size : Ø56 x H86mm

Cut out : 35mm

IP Rating : IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Needle-SD03	5W	350lm	3000K 4000K	90	15° 24° 36° 60°	White Black	Ø56*H86mm	

DRACO | Recessed Spotlight



Super slim downlight with 40mm thickness. High lumen efficiency. Interchangeable CCT (3000K+4000K) with slide switch.

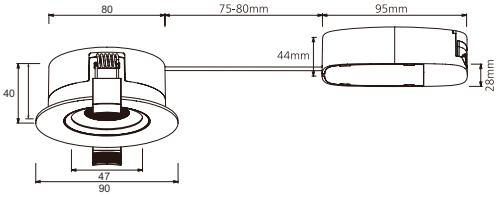

Technical Details

Power : 7W

CCT : 3000K | 4000K

CRI : >90

Beam Angle : 60°

Lumen Output : 120lm/W

Input Voltage : AC 220-240V

Driver : Triac

Material : Aluminium

Finishing Color : Black | White


Reflector : Polycarbonate

Size : Ø90 x H40mm

Cut out : Ø83-85mm

IP Rating : IP54 | IP20

Light Distribution



Light Performance



Order Options


Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Draco-US01	7W	120lm	3000K 4000K	90	60°	White Black	Ø90 x H40mm	

SCORPIUS | Recessed Spotlight





Extension design downlight.
High lumen efficiency.
Pull Out Design, 350 degree horizontal rotation and 20 degree vertically rotation to meet more application.

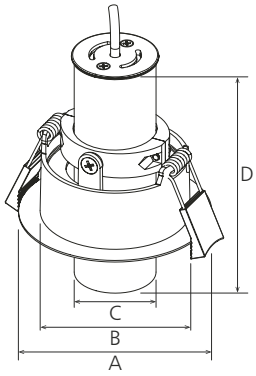

Technical Details

Power : 6W | 10W | 12W

CCT : 2700K | 3000K | 4000K

CRI : >90

Beam Angle : 24° | 36

Lumen Output : 100lm/W

Input Voltage : AC 220-240V

Driver : Triac

Material : Die Cast Aluminium

Finishing Color : Black | White

Reflector : PMMA

Size : Ø85 x H111.5mm | Ø100 x H131.5mm | Ø100 x H131.5mm

Cut out : Ø68-80mm | Ø82-95mm | Ø82-95mm

IP Rating : IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Scorpius-US01	6W 10W 12W	100lm	2700K 3000K 4000K	90	12° 36°	White Black	Ø85 x H111.5mm Ø100 x H131.5mm Ø100 x H131.5mm	

CALLISTO-OV | Recessed Spotlight





Recessed LED Spotlight with oval pinhole opening. Housing and Mounting ring made of die-casting aluminum. Light tilts to a maximum of 0°-30° onto the vertical plane.

Technical Details

Power : 7W | 10W | 12W

CCT : 2700K | 3000K | 4000K | 6000K

CRI : >90

Beam Angle : 15° | 24° | 38°

Lumen Output : 90lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : Black | White

Reflector :

Size : Ø85 x H92mm

Cut out : Ø75mm

IP Rating : IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-CallistoOV-SD03	7W 10W 12W	90lm	2700K 3000K 4000K 6000K	90	15° 24° 38°	White Black	Ø85 x H92mm	

CALLISTO-SQ | Recessed Spotlight





Recessed LED Spotlight with square pinhole opening. Housing and Mounting ring made of die-casting aluminum. Light tilts to a maximum of 0°-30° onto the vertical plane.

Technical Details

Power : 7W | 10W | 12W

CCT : 2700K | 3000K | 4000K | 6000K

CRI : >90

Beam Angle : 15° | 24° | 38°

Lumen Output : 90lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : Black | White

Reflector :

Size : Ø85 x H92mm

Cut out : Ø75mm

IP Rating : IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-CallistoSQ-SD03	7W 10W 12W	90lm	2700K 3000K 4000K 6000K	90	15° 24° 38°	White Black	Ø85 x H92mm	

CALLISTO-RD | Recessed Spotlight



Recessed LED Spotlight with pinhole opening. Housing and Mounting ring made of die-casting aluminum. Light tilts to a maximum of 0°-30° onto the vertical plane.



Technical Details

- Power : 7W | 10W | 12W
- CCT : 2700K | 3000K | 4000K | 6000K
- CRI : >90
- Beam Angle : 15° | 24° | 38°
- Lumen Output : 90lm/W
- Input Voltage : AC 220-240V
- Driver : Triac | 1-10V | DALI
- Material : Die Cast Aluminium
- Finishing Color : Black | White
- Reflector :
- Size : Ø85 x H92mm
- Cut out : Ø75mm
- IP Rating : IP20

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-CallistoRD-SD03	7W 10W 12W	90lm	2700K 3000K 4000K 6000K	90	15° 24° 38°	White Black	Ø85 x H92mm	


GEMINI | Recessed Spotlight



Deep antiglare design to create a good lighting environment. Precise angle, perfect light control. Good heat dissipation. Snap in mounting design, simple and convenient.


Technical Details


- Power : 5W | 7W
- CCT : 3000K | 4000K
- CRI : >90
- Beam Angle : 15° | 24° | 38°
- Lumen Output : 80lm/W
- Input Voltage : AC 220-240V
- Driver :
- Material : Die Cast Aluminium
- Finishing Color : Black | White
- Reflector : White | Black
- Size : Ø68 x H60mm | Ø80 x H60mm
- Cut out : Ø60mm | Ø75mm
- IP Rating : IP20

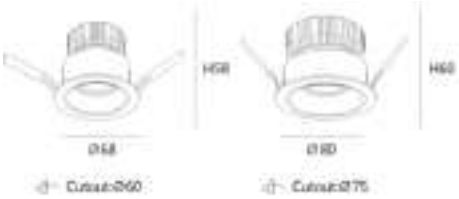




Light Distribution

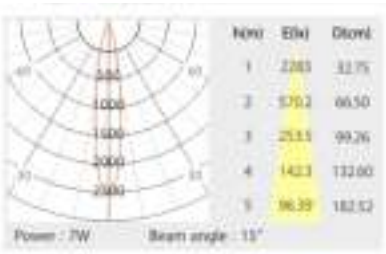

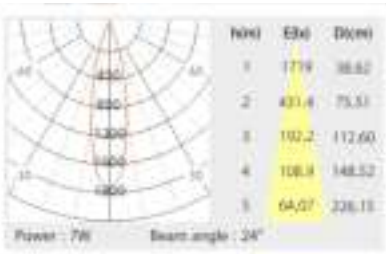

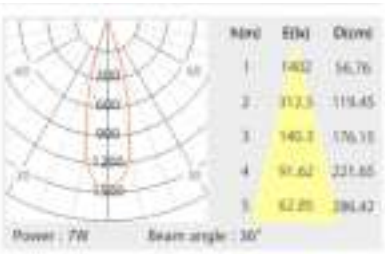

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Gemini-GL09	5W 7W	80lm	3000K 4000K	90	15° 24° 38°	White Black	Ø68 x H60mm Ø80 x H60mm	

VIRGO | Recessed Spotlight



Deep antiglare design to create a good lighting environment. Precise angle, perfect light control. Good heat dissipation. Snap in mounting design, simple and convenient.

Technical Details

Power : 5W | 7W | 10W

CCT : 3000K | 4000K

CRI : >90

Beam Angle : 15° | 24° | 38°

Lumen Output : 80lm/W

Input Voltage : AC 220-240V

Driver :

Material : Die Cast Aluminium

Finishing Color : Black | White

Reflector : White | Black | Silver

Size : Ø70 x H80mm | Ø85 x H85mm
Ø95 x H97mm


Cut out : Ø60mm | Ø75mm | Ø85mm


IP Rating : IP20






Light Distribution

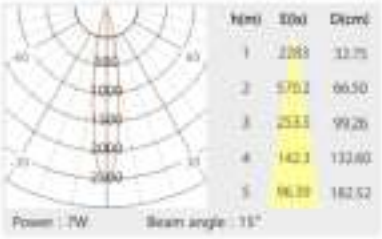

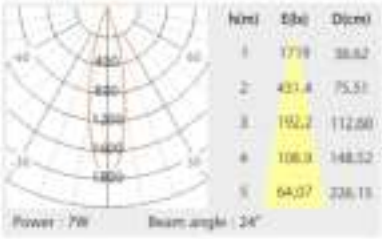

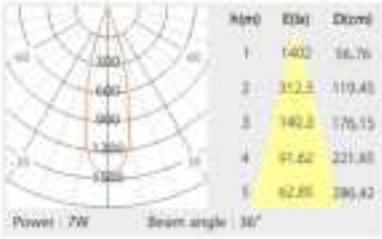

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Virgo-GL09	5W 7W 10W	80lm	3000K 4000K	90	15° 24° 38°	White Black	Ø70 x H80mm Ø85 x H85mm Ø95 x H97mm	

VEGA | Recessed Spotlight



Deep antiglare design to create a good lighting environment. Precise angle, perfect light control. Good heat dissipation. Snap in mounting design, simple and convenient.

Technical Details

- Power : 12W
- CCT : 3000K | 4000K
- CRI : >90
- Beam Angle : 20°
- Lumen Output : 80lm/W
- Input Voltage : AC 220-240V
- Driver :
- Material : Die Cast Aluminium
- Finishing Color : Black | White
- Reflector : White | Black
- Size : Ø85 x H88mm
- Cut out : Ø80mm
- IP Rating : IP20





Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Vega-GL09	12W	80lm	3000K 4000K	90	20°	White Black	Ø85 x H88mm	

CASTOR | Recessed Spotlight



COB downlight with optical lens design. Light tilts to a maximum of 0°-30° onto the vertical plane.


Technical Details

- Power : 6W | 10W
- CCT : 2700K | 3000K | 4000K
- CRI : >90
- Beam Angle : 24° | 36° | 60°
- Lumen Output : 110lm/W
- Input Voltage : AC 220-240V
- Driver : Triac | 1-10V | DALI
- Material : Die Cast Aluminium
- Finishing Color : Black | White
- Reflector : White | Black
- Size : Ø90 x H77mm
- Cut out : Ø83mm
- IP Rating : IP20





Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Castor-VZ10	6W 10W	110lm	2700K 3000K 4000K	90	24° 36° 60°	White Black	Ø90 x H77mm	


ANTARES | Recessed Spotlight



COB LED with a high efficiency reflector of optical. Body made of Cast aluminum with anti-rust powder coating process. Driver with waterproof box.

Technical Details

- Power : 6W | 10W
- CCT : 2700K | 3000K | 4000K
- CRI : >90
- Beam Angle : 24° | 36° | 60°
- Lumen Output : 100lm/W
- Input Voltage : AC 220-240V
- Driver : ON-OFF
- Material : Die Cast Aluminium
- Finishing Color : Black | White
- Reflector : White | Black
- Size : Ø87 x H44mm
- Cut out : Ø80mm
- IP Rating : IP65





Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Antares-VZ10	6W 10W	100lm	2700K 3000K 4000K	90	24° 36° 60°	White Black	Ø87 x H44mm	