
EQUINOX | Underwater Lights



Underwater LED lights are high-performance, energy-efficient luminaries designed specifically for submerged applications such as swimming pools, fountains, ponds, water features, and decorative installations. Equipped with high-intensity LEDs, they deliver vibrant, uniform illumination with excellent color rendering and a variety of color options, including single color (white, warm white, cool white) and RGB for dynamic color-changing effects.





Technical Details

Power : 1W | 9W | 18W

CCT : 3000K | 4000K | 6000K | Red | Green | Blue | Amber

CRI : 90

Beam Angle : 10° | 25° | 40°

Lumen Output : 85lm | 675lm | 1350lm

Input Voltage : DC 24V

Driver : -

Material : 316L Stainless steel

Finishing Color : 316L Stainless steel

Reflector : Tempered Glass

Size : Ø105 x H71mm | Ø115 x H65mm | Ø180 x H75mm

Cut out : Ø70mm | Ø78mm | Ø138mm

IP Rating : IP68

Accessories : Recessing tube

Light Distribution



Light Performance



Order Options


Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
UL-Equinox-EM07	1W 9W 18W	85lm 675lm 1350lm	3000K 4000K 6000K RED GREEN BLUE AMBER	90	10° 25° 40°	316L Stainless steel	Ø105 x H71mm Ø115 x H65mm Ø180 x H75mm	Recessing tube

RING | Underwater Lights





Underwater LED lights are high-performance, energy-efficient luminaries designed specifically for submerged applications such as swimming pools, fountains, ponds, water features, and decorative installations. Equipped with high-intensity LEDs, they deliver vibrant, uniform illumination with excellent color rendering and a variety of color options, including single color (white, warm white, cool white) and RGB for dynamic color-changing effects.



Technical Details

Power : 3W | 9W | 18W | 25W

CCT : 3000K | 4000K | 6000K | Red | Green | Blue

CRI : 90

Beam Angle : 15° | 30° | 45° | 60°

Lumen Output : 255lm | 765lm | 1530lm | 2125lm

Input Voltage : DC 24V

Driver : 1-10V | DALI | DMX

Material : Hard Chrome plated Molding
Stainless steel

Finishing Color : Stainless steel

Reflector : Tempered Glass


Size : Ø100 x 61mm | Ø150 x 83mm | Ø180 x 109mm

Cut out : -

IP Rating : IP68

Accessories :

Light Distribution

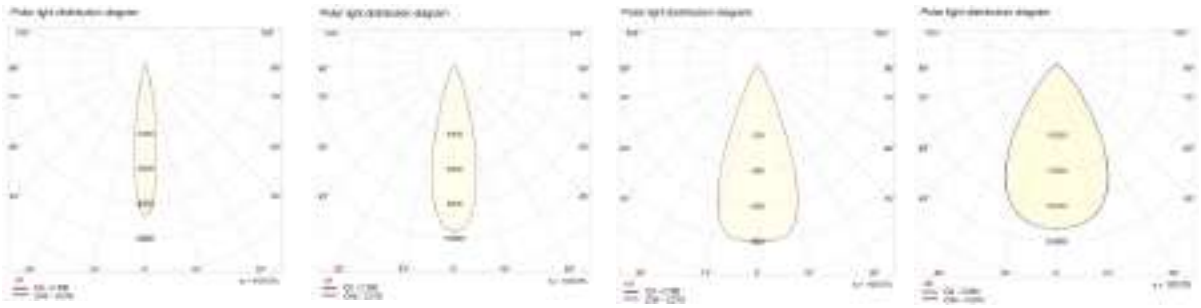

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
UL-Ring-BL04	3W 9W 18W 25W	255lm 765lm 1530lm 2125lm	3000K 4000K 6000K RGB	90	15° 30° 45° 60°	Stainless steel	Ø100 x 61mm Ø150 x 83mm Ø180 x 109mm	

ELECTRON | Underwater Lights




Underwater LED lights are high-performance, energy-efficient luminaries designed specifically for submerged applications such as swimming pools, fountains, ponds, water features, and decorative installations. Equipped with high-intensity LEDs, they deliver vibrant, uniform illumination with excellent color rendering and a variety of color options, including single color (white, warm white, cool white) and RGB for dynamic color-changing effects.

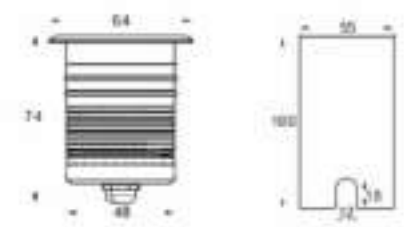

Technical Details

- Power : 3W | 5W
- CCT : 2700K | 3000K | 4000K | 6500K | Red | Green | Blue | Yellow | Amber | RGB 4in 1
- CRI : 90
- Beam Angle : 15° | 24° | 38°
- Lumen Output : 255lm | 425lm
- Input Voltage : DC 24V
- Driver : 1-10V | DALI | DMX
- Material : Stainless steel
- Finishing Color : Stainless steel
- Reflector : Tempered Glass
- Size : Ø64 x H74mm | Ø80 x H85mm
- Cut out : Ø54mm | Ø69mm
- IP Rating : IP68
- Accessories : Mounting sleeve

Light Distribution

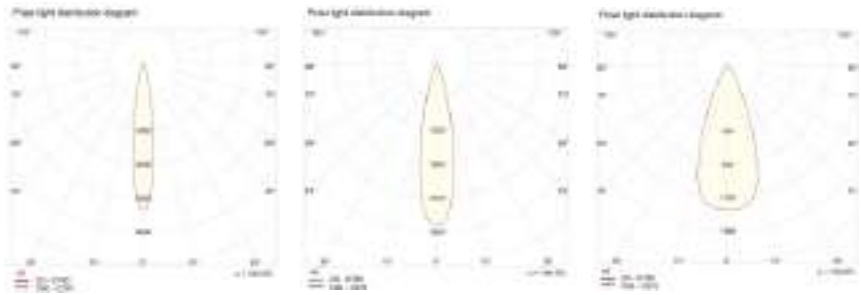

Light Performance




Order Options


Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
UL-Electron-BL04	3W 5W	255lm 425lm	2700K 3000K 4000K 6500K RED GREEN BLUE YELLOW AMBER RGB 4 in 1	90	15° 24° 38°	Stainless steel	Ø64 x H74mm Ø80 x H85mm	Mounting sleeve

TRITON | Underwater Lights



Underwater LED lights are high-performance, energy-efficient luminaries designed specifically for submerged applications such as swimming pools, fountains, ponds, water features, and decorative installations. Equipped with high-intensity LEDs, they deliver vibrant, uniform illumination with excellent color rendering and a variety of color options, including single color (white, warm white, cool white) and RGB for dynamic color-changing effects.

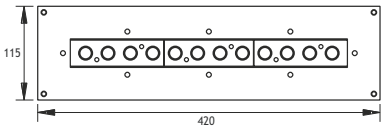

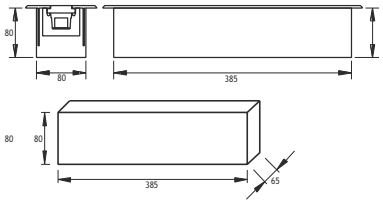

Technical Details

Power : 12W | 27W

CCT : 3300K | 4500K | 6000K | Red | Green | Blue | Amber | RGB

CRI : 80

Beam Angle : 25° | 40°

Lumen Output : 840lm | 1350lm

Input Voltage : DC 24V

Driver : 1-10V | DALI | DMX

Material : Stainless steel

Finishing Color : Stainless steel

Reflector : Glass


Size : L420 x W115 x H80mm

Cut out : L385 x W80mm

IP Rating : IP68

Accessories : Recessing Box

Light Distribution

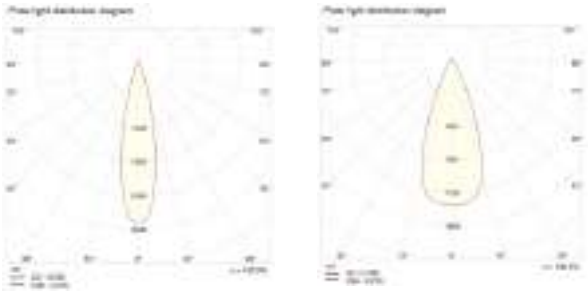

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
UL-Triton-BL04	12W 27W	840lm 1350lm	3300K 4500K 6000K RED GREEN BLUE AMBER RGB	90	25° 40°	Stainless steel	L385 x W80mm	Recessing box