PULSAR | Wall Washer Lights



The outdoor wall washer light is an architectural lighting fixture designed to deliver uniform, high-intensity illumination across building facades, landscape features, or large exterior walls. It highlights textures and structures with dramatic lighting effects, enhancing the nighttime appearance of residential, commercial, and public spaces.





Technical Details

Power : 9W | 18W | 36W

CCT : 2700K | 3000K | 4000K | 6000K
Green | Blue | Red | RGB

CRI : 80

Beam Angle : 15° | 30° | 46° | 60° | 10°x45° | 15°x55° | 20°x40°

Lumen Output : 1170lm | 2340lm | 4680lm

Input Voltage : DC 24V

Driver : 0-10V | Dali | DMX | Tunable white

Material : Aluminium

Finishing Color : Black


Reflector : Tempered Glass


Size : L314 x W38 x H80mm | L507 x W38 x H80mm
L615 x W38 x H80mm | L1002 x W38 x H80mm
| L1218 x W38 x H80mm

IP Rating : IP66

Accessories : Anti glare shield | Anti glare baffle
| Extended brackets for side mounting

Light Distribution





Light Performance



Order Options


Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WW-Pulsar-TP10	9W 18W 36W	1170lm 2340lm 4680lm	2700K 3000K 4000K 6000K RED GREEN BLUE RGB	80	15° 30° 46° 60° 10°x45° 15°x55° 20°x40°	Black	L314 x W38 x H80mm L507 x W38 x H80mm L615 x W38 x H80mm L1002 x W38 x H80mm L1218 x W38 x H80mm	Anti glare shield Anti glare baffle Extended brackets for side mounting

APOLLO | Wall Washer Lights



The outdoor wall washer light is an architectural lighting fixture designed to deliver uniform, high-intensity illumination across building facades, landscape features, or large exterior walls. It highlights textures and structures with dramatic lighting effects, enhancing the nighttime appearance of residential, commercial, and public spaces.





Technical Details

Power : 18W | 35W | 55W | 65W

CCT : 2700K | 3000K | 4000K | 6000K
Green | Blue | Red | RGB

CRI : 80

Beam Angle : 10° | 20° | 30° | 40° | 60° |
15°x55° | 15°x40°

Lumen Output : 1620lm | 3150lm | 4950lm | 5850lm

Input Voltage : AC 100-240V

Driver : 0-10V | Dali | DMX | Tunable white

Material : Aluminium

Finishing Color : Black


Reflector : Tempered Glass

Size : L350 x W55 x H130mm | L620 x W55 x H130mm
L1015 x W55 x H130mm | L1220 x W55x H130mm

IP Rating : IP66

Accessories : Anti glare shield | Anti glare baffle
| Extended brackets for side mounting

Light Distribution

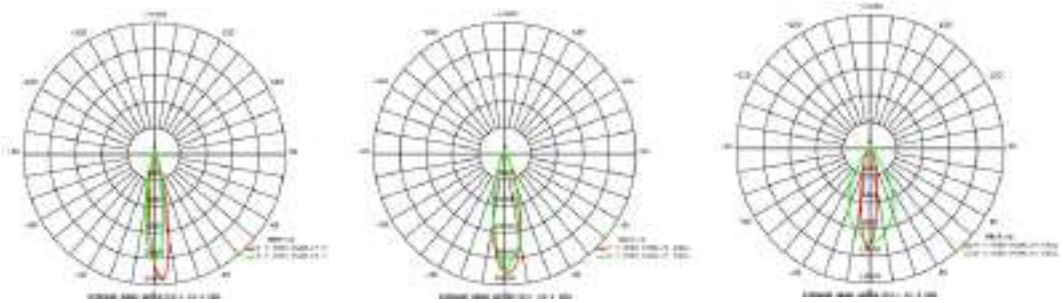


Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WW-Apollo-TP10	18W 35W 55W 65W	1620lm 3150lm 4950lm 5850lm	2700K 3000K 4000K 6000K RED GREEN BLUE RGB	80	10° 20° 30° 40° 60° 15°x55° 15°x40°	Black	L350 x W55 x H130mm L620 x W55 x H130mm L1015 x W55 x H130mm L1220 x W55x H130mm	Anti glare shield Anti glare baffle Extended brackets for side mounting

ABNER | Wall Washer Lights

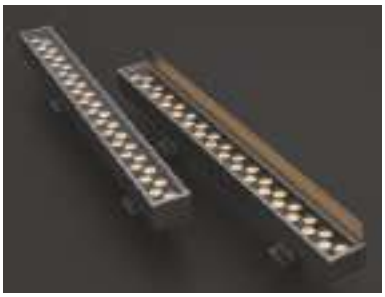

The outdoor wall washer light is an architectural lighting fixture designed to deliver uniform, high-intensity illumination across building facades, landscape features, or large exterior walls. It highlights textures and structures with dramatic lighting effects, enhancing the nighttime appearance of residential, commercial, and public spaces.

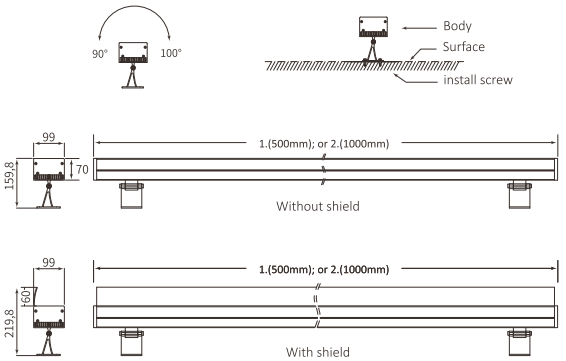

Technical Details

Power : 144W

CCT : 2700K | 3000K | 4000K | 6000K
Green | Blue | Red | RGB | RGBW

CRI : 80

Beam Angle : 5° | 10° | 30° | 45° | 60° |
20°x60° | 10°x40°

Lumen Output : 10800lm

Input Voltage : AC 100-240V

Driver : Dali | DMX

Material : Extruded aluminum 6063

Finishing Color : Black | Silver | Grey | White


Reflector : Tempered Glass

Size : L1000 x W99 x H70mm

IP Rating : IP66

Accessories : Honeycomb louvre | Anti glare shield

Light Distribution

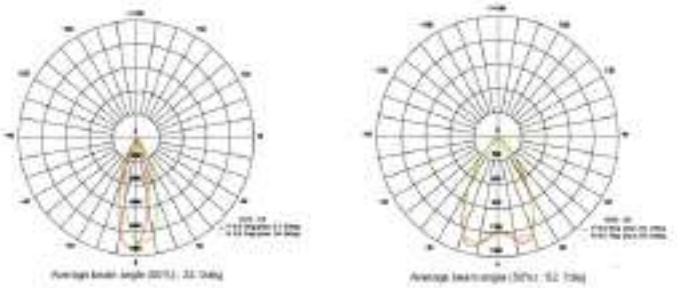

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WW-Abner-TP10	144W	10800lm	2700K 3000K 4000K 6000K RED GREEN BLUE RGB RGBW	80	5° 10° 30° 45° 60° 20°x60° 10°x40°	Black Silver Grey White	L1000 x W99 x H70mm	Honeycomb louvre Anti glare shield

MILKYWAY | Wall Washer Lights



The outdoor wall washer light is an architectural lighting fixture designed to deliver uniform, high-intensity illumination across building facades, landscape features, or large exterior walls. It highlights textures and structures with dramatic lighting effects, enhancing the nighttime appearance of residential, commercial, and public spaces.

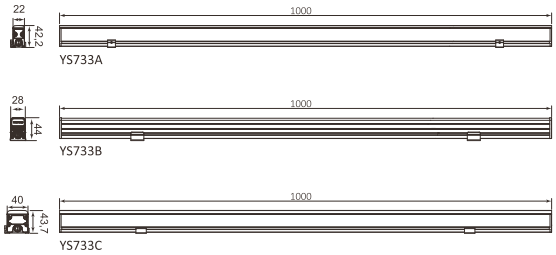

Technical Details

Power : 8W | 10W | 12W | 15W

CCT : 2700K | 3000K | 4000K | 6500K
Green | Blue | Red | Amber | RGB | RGBW

CRI : 80

Beam Angle : 120°

Lumen Output : 280lm | 350lm | 420lm | 525lm

Input Voltage : DC 24V

Driver : DMX

Material : Extruded aluminum 6063


Finishing Color : Black | Silver | Grey | White

Reflector : PMMA Diffuser

Size : L1000 x W22 x H42.2mm | L1000 x W28 x H44mm

IP Rating : IP66

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WW-Milkyway-YL01	8W 10W 12W 15W	280lm 350lm 420lm 525lm	2700K 3000K 4000K 6500K RED GREEN BLUE AMBER RGB RGBW	80	120°	Black Silver Grey White	L1000 x W22 x H42.2mm L1000 x W28 x H44mm	

WAVE | Wall Washer Lights



The outdoor wall washer light is an architectural lighting fixture designed to deliver uniform, high-intensity illumination across building facades, landscape features, or large exterior walls. It highlights textures and structures with dramatic lighting effects, enhancing the nighttime appearance of residential, commercial, and public spaces.

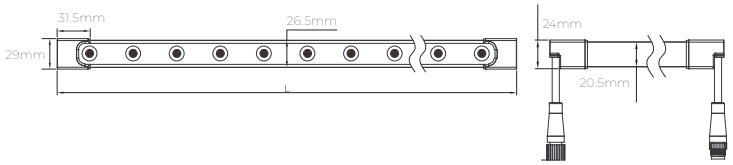

Technical Details

Power : 18W/mtr | 24W/mtr

CCT : 2700K | 3000K | 4000K | 6500K
Green | Blue | Red | RGB

CRI : 80

Beam Angle : 15° | 30° | 50° | 20°x35° |
8°x20° | 20°x55°

Lumen Output : 515lm/mtr | 1525lm/mtr

Input Voltage : AC 100-240V

Driver : PWM | DMX

Material : Silicone

Finishing Color : Black


Reflector : Lens

Size : L5000 x W29 x H24mm

IP Rating : IP65

Accessories : Mounting clips | Aluminum profile

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WW-Wave-LI04	18W/mtr 24W/mtr	515lm/mtr 1525lm/mtr	2700K 3000K 4000K 6500K RED GREEN BLUE RGB	80	15° 30° 50° 20°x35° 8°x20° 20°x55°	Black	L5000 x W29 x H24mm	Mounting clips Aluminum profile

Pulsar RGBW | Wall Washer Lights




Outdoor LED Wall Washer is a high-performance lighting fixture designed to highlight building façades, landscapes, and architectural features. It offers uniform light distribution, energy efficiency, and durable weatherproof construction for long-term outdoor use.

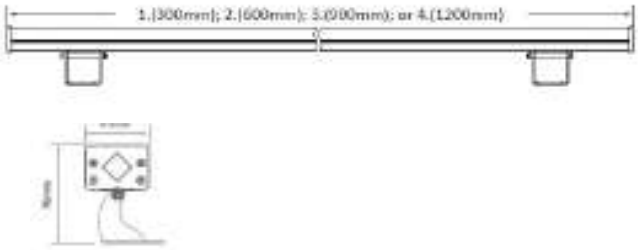

Technical Details

Power : 28W
Lumen Output :1539lm
CRI :>80
Beam Angle : 8°/10°/30°/45°/60°/10*40°/20*60°/Asymmetric
CCT : RGBW
Input Voltage :DC 24V
Driver : DMX
Material : Extruded Aluminium 6063
Finishing Color : Black
Reflector : Tempered Glass
Size :L300 x W72 x H76 mm
IP Rating : IP66

Light Distribution

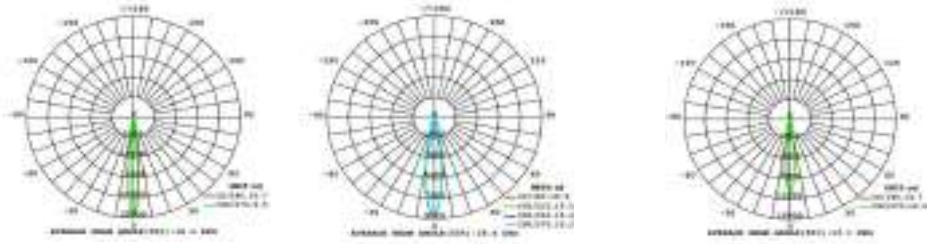

Light Performance



Order Options


Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-YS112-28	28W	1539lm	RGBW	>80	8°/10°/30°/45°/ 60°/10*40°/20*60° /Asymmetric	Black	L300 x W72 x H86 mm	Antiglare Shield Honeycomb louver Fixed/Adjustable bracket

Pulsar RGBW | Wall Washer Lights



Outdoor LED Wall Washer is a high-performance lighting fixture designed to highlight building façades, landscapes, and architectural features. It offers uniform light distribution, energy efficiency, and durable weatherproof construction for long-term outdoor use.








Technical Details

Power : 41W
Lumen Output :2280lm
CRI :>80
Beam Angle : 8°/10°/30°/45°/60°/10*40°/20*60°/Asymmetric
CCT : RGBW
Input Voltage :DC 24V
Driver : DMX
Material : Extruded Aluminium 6063
Finishing Color : Black
Reflector : Tempered Glass
Size :L900 x W72 x H76 mm
IP Rating : IP66

Light Distribution







Light Performance



Order Options


Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-YS112-41	41W	2280lm	RGBW	>80	8°/10°/30°/45°/ 60°/10*40°/20*60° /Asymmetric	Black	L900 x W72 x H86 mm	Antiglare Shield Honeycomb louver Fixed/Adjustable bracket

Pulsar RGBW | Wall Washer Lights



Outdoor LED Wall Washer is a high-performance lighting fixture designed to highlight building façades, landscapes, and architectural features. It offers uniform light distribution, energy efficiency, and durable weatherproof construction for long-term outdoor use.






Technical Details

Power : 28W/41W
Lumen Output :1539lm/2280lm
CRI :>80
Beam Angle : 8°/10°/30°/45°/60°/10*40°/20*60°/Asymmetric
CCT : RGBW
Input Voltage :DC 24V
Driver : DMX
Material : Extruded Aluminium 6063
Finishing Color : Black
Reflector : Tempered Glass
Size :L300 x W47 x H76 mm/L900 x W47 x H76 mm
IP Rating : IP66

Light Distribution

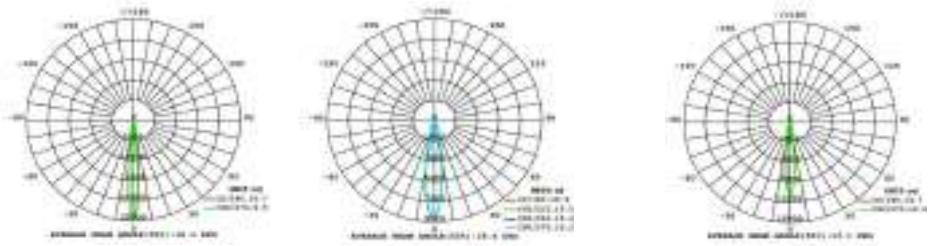

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
EL-YS112-28	28W	1539lm	RGBW	>80	8°/10°/30°/45°/ 60°/10*40°/20*60° /Asymmetric	Black	L300 x W47 x H76 mm	Antiglare Shield Honeycomb louver Fixed/Adjustable bracket
EL-YS112-41	41W	2280lm					L900 x W47 x H76 mm	