
INVENTAA | Weatherproof Lights



Made of clear polycarbonate, the base and the diffuser boast high impact and deformation resistance.





Technical Details

Power : 32W

CCT : 3000K | 4000K

CRI : 90

Beam Angle : 180°

Lumen Output : 158lm/w

Input Voltage : AC 220-240V

Driver : DALI

Material : Polycarbonate

Finishing Color : Grey


Reflector : –

Size : L1170 x W98 x H91mm

Cut out : –

IP Rating : IP66

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WP-Inventaa-TV07	32W	158lm	3000K 4000K	90	180°	Grey	L1170 x W98 x H91mm	

KUMA | Weatherproof Lights



Made of clear polycarbonate, the base and the diffuser boast high impact and deformation resistance. With high lumen SMD LED and PC diffuser, which ensures uniform lighting and high light efficiency.



Technical Details

Power : 17W | 32W | 44W

CCT : 3000K | 4000K | 5000K

CRI : 80

Beam Angle : 120°

Lumen Output : 3200lm | 6100lm | 8300lm

Input Voltage : AC 220-240V

Driver : DALI

Material : Polycarbonate

Finishing Color : Grey


Reflector : –

Size : L600 x W79 x H68mm |
L1200 x W79 x H68mm | L1500 x W79 x H68mm

Cut out : –

IP Rating : IP65

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WP-Kuma-LL13	17W 32W 44W	3200lm 6100lm 8300lm	3000K 4000K 5000K	80	120°	Grey	L600 x W79 x H68mm L1200 x W79 x H68mm L1500 x W79 x H68mm	

MIRA | Weatherproof Lights



This light has optimum balance for Performance, Functionality and Price. It is Powerful, Light Efficient, Versatile, and Endurable.





Technical Details

Power : 18W | 36W | 46W

CCT : 3000K | 4000K | 5000K

CRI : 80

Beam Angle : 120°

Lumen Output : 2160lm | 4320lm | 5520lm

Input Voltage : AC 220-240V

Driver : DALI

Material : Polycarbonate

Finishing Color : Grey


Reflector : –

Size : L611 x W58 x H62mm |
L1211 x W58 x H62mm | L1511 x W58 x H62mm

Cut out : –

IP Rating : IP65

Light Distribution

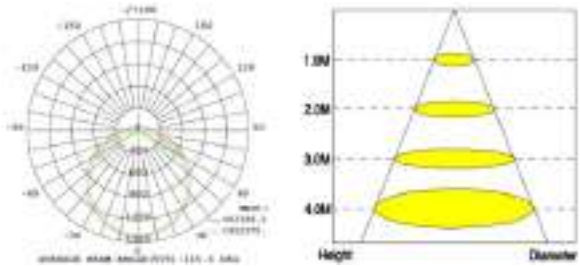

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WP-Mira-LL13	18W 36W 46W	2160lm 4320lm 5520lm	3000K 4000K 5000K	80	120°	Grey	L611 x W58 x H62mm L1211 x W58 x H62mm L1511 x W58 x H62mm	

ELECTRA | Weatherproof Lights



A versatile lighting solution designed for a wide range of professional and institutional environments. Ideal for offices, schools, healthcare settings, and public buildings, it delivers reliable, energy-efficient illumination with a clean, modern design.





Technical Details

Power : 20W | 38W | 48W

CCT : 3000K | 4000K | 5000K

CRI : 80

Beam Angle : 120°

Lumen Output : 2630lm | 5280lm | 6750lm

Input Voltage : AC 220-240V

Driver : DALI

Material : Sheet Steel/ Polycarbonate

Finishing Color : White


Reflector : Steel Sheet

Size : L610 x W146 x H85mm |
L1170 x W146 x H85mm | L1450 x W146 x H85mm

Cut out : –

IP Rating : IP44

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WP-Electra-TV07	20W 38W 48W	2630lm 5280lm 6750lm	3000K 4000K 5000K	80	120°	White	L610 x W146 x H85mm L1170 x W146 x H85mm L1450 x W146 x H85mm	

SARGAS | Weatherproof Lights

The luminaire is an excellent choice for sanitary rooms, toilets, kitchen units, wall units, dressing rooms, worktops and shop windows.

Technical Details

Power : 15W | 30W | 36W

CCT : 3000K | 4000K | 5000K

CRI : 80

Beam Angle : 120°

Lumen Output : 2130lm | 4250lm | 5360lm

Input Voltage : AC 220-240V

Driver : -

Material : Aluminium/ Polycarbonate

Finishing Color : White


Reflector : Aluminium

Size : L610 x W146 x H85mm |
L1170 x W146 x H85mm | L1450 x W146 x H85mm


Cut out : –

IP Rating : IP20





Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WP-Sargas-TV07	15W 30W 36W	2130lm 4250lm 5360lm	3000K 4000K 5000K	80	120°	White	L610 x W146 x H85mm L1170 x W146 x H85mm L1450 x W146 x H85mm	